



# ***Mustang 300 DS***

## ***Dual-Speed Floor Machine***



For a versatile, economical dual-speed floor machine, nothing beats the Mustang 300 DS. Precision-balanced for easy operation and maneuverability, this machine saves time and money by effectively doing the job of two scrubbers—a standard 180 RPM floor machine and a 300 RPM buffer.

- High-speed operation is perfect for polishing, buffing, or damp scrubbing hard floors. The Mustang 300DS can also be used with a bonnet for routine carpet maintenance.
- Low speed operation is used for efficient scrubbing, wet stripping, and polishing in congested areas where greater control is needed.
- A lock-out safety mechanism on the handle prevents unauthorized operation if the machine is left unattended.
- Available in 17 and 20-inch widths, the Mustang 300 DS is ideal for schools, office buildings, and other facilities where appearances need to be kept up while holding equipment costs down.

**NSS Enterprises, Inc.**  
3115 Frenchmens Road  
Toledo, Ohio 43607-2958  
USA  
[www.nss.com](http://www.nss.com)



# Mustang 300 DS Specifications

Buffing Path	17 in. (43.2 cm) 20 in. (50.8 cm)	Gear	3-idler planetary	Weight -Machine (w/ pad driver) • 17 in. (43 cm) • 20 in. (51 cm)	86 lbs. (39 kg) 93 lbs. (42 kg)
Motor -Type	Permanent magnet DC rectified 1.5 HP (1100 watts) 66 frame 110-120V. 220-240V. available	Pad Speed -High -Low	300 RPM 180 RPM		
-HP -Size -Voltage		15 amps @ 120V. 7.5 amps @ 240V.	Cord -120V. -240V.	50 ft. (15.2 m) 14-3 ST safety yellow 75 ft. (23 m) 16-3 ST SHUKO safety yellow	-Shipping (w/ pad driver) • 17 in. (43 cm) • 20 in. (51 cm)
Current				Warranty	3 year limited
Productivity					
	Polish	Scrub	Shampoo	Spray Buff	
17 in.	7,000 Sq. ft. per hour	2,700 sq. ft. per hour	1,200 sq. ft. per hour	2,700 sq. ft. per hour	
20 in.	10,000 sq. ft. per hour	3,600 sq. ft. per hour	1,430 sq. ft. per hour	3,100 sq. ft. per hour	



The Mustang 300 DS features a mechanical lock-out on the handle, which must be released before the switch lever can be activated. This important safety feature prevents unauthorized operation if the machine is left unattended.

**1** Metal cord strain relief and internal compression lock prevent the cord from being pulled out of the machine.


**2** Sturdy 1.5-in. tube handle is chrome-plated to resist corrosion.

**3** 5-in. rear transport wheels make the Mustang 300DS easy to move to the job site.

**6** Dual switch levers allow the operator to easily control the side-to-side movement of the machine.

**5** The protected toggle switch on the rear of the machine body permits easy transition from high speed (300 RPM) to low speed (180 RPM).

**4** 360° non-marking bumper protects walls and fixtures from accidental damage.

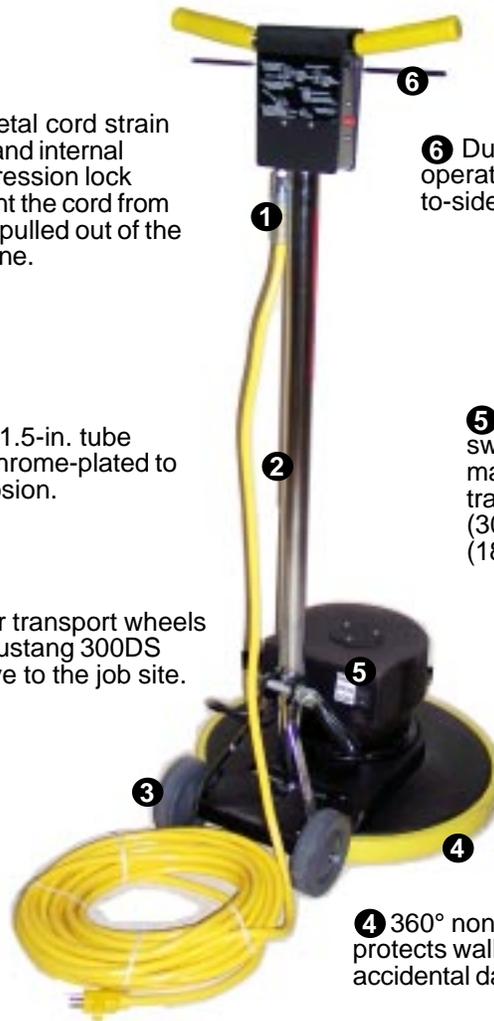

**NSS® Enterprises, Inc.**  
3115 Frenchmens Road  
Toledo, Ohio 43607-2958 USA  
419/531-2121 or 800/677-1663  
Fax 419/531-3761  
[www.nss.com](http://www.nss.com)  
[mailus@nss.com](mailto:mailus@nss.com)  
Specifications and appearance  
subject to change without notice.

DISTRIBUTED BY