



# ***Pacer 112 UE | 115 UE***

***12" and 15" Single-Motor Upright Vacuums***



Incorporating the latest innovations, the Pacer 112 UE and 115 UE are single-motor upright vacuums designed for reliability.

- Lightweight, ergonomic design reduces operator fatigue.
  - Variable handle adjustment for different height users.
  - Closed handle allows a relaxed grip.
  - Large carrying handle makes transport easy.
- Powerful 1.5 HP motor and Chevron style brush for thorough cleaning.
- Thorough three-step filtration: two-ply bag, motor filter, and exhaust filter.
- Reliable mechanical clutch disconnects brush when jammed.
- Detachable suction tube makes clearing clogs simple.
- Molded rubber bumper protects fixtures and furniture.
- No expensive electronic controls to repair or replace.
- Durable polypropylene body and base stands up to commercial use.
- Simple cord wrap release for quick access.
- Optional HEPA filter available as well as cloth and fleece filter bags.

**NSS Enterprises, Inc.**  
3115 Frenchmens Road  
Toledo, Ohio 43607-2958  
USA  
[www.nss.com](http://www.nss.com)



# Pacer 112 / 115 UE Specifications

Brush	Chevron style brush	Cord	40 ft. (12 m) 18-3 SJT safety yellow	Dimensions	
Motor	2-stage, 9 amps @ 120V.(1150 watts)	Construction	Composite Polypropylene body and base	-Height	48.75 in. (125 cm)
-Type	1.5 HP	Sound Level	67 dbA	-Width	12.5 in. (31.7 cm)
-Air Flow	Maximum 102 CFM (48 l./sec.)	Bag Capacity	5.1 quarts dry (4.8 liters)	•112 UE	15.5 in. (39.3 cm)
-Waterlift	84 in.	Cleaning Path		•115 UE	17.4 lbs. (7.9 kg)
Filtration	3 Stage—Top-filled, two-ply poly-lined filter bag, motor filter, and exhaust filter. HEPA optional.	-112 UE	12 in. (30 cm)	-Shipping Wt	18 lbs. (8.2 kg)
Switches & Controls	Rocker on/off switch and bag full indicator light	-115 UE	15 in. (38 cm)	Warranty	23 lbs. (10.4 kg)
Productivity— Floor coverage for the Pacer 112 UE is 3,430 sq. ft. per hour (319 m <sup>2</sup> ), and floor coverage for the 115 UE is 4,275 sq. ft. per hour (398 m <sup>2</sup> ).				2 years, including belt, excluding wear items	

## 3-Stage Filtration



1) Easily secured, self-sealing filter bag



2) Motor filter



3) Exhaust filter (Optional HEPA exhaust filter available)

1 Enclosed handle allows for a relaxed grip during operation.

2 Built-in extension hose and wand make above-the-floor cleaning a snap.

3 Convenient carrying handle makes transport easy.


4 Brush adjustment dial on the base allows for instant carpet pile adjustments

5 Chevron style brush is built for tough commercial use, and is easily removed for replacement.

8 Cord strain relief prevents damage to the power cord.

7 The handle is adjustable for different height operators.

6 Shock absorbing wheels keep the vacuum quiet on rough surfaces.

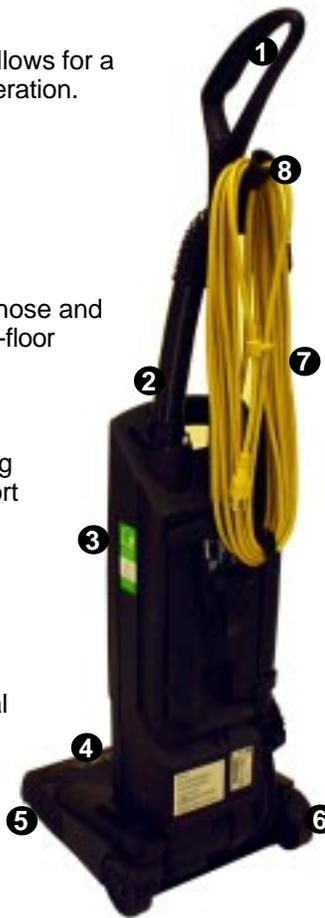

The Pacers come equipped with a crevice tool and upholstery tool.



**NSS® Enterprises, Inc.**  
 3115 Frenchmens Road  
 Toledo, Ohio 43607-2958 USA  
 419/531-2121 or 800/677-1663  
 Fax 419/531-3761  
[www.nss.com](http://www.nss.com)  
[mailus@nss.com](mailto:mailus@nss.com)  
 Specifications and machine appearance  
 subject to change without notice.

DISTRIBUTED BY