



Wrangler[®] 2730/3330 DB

27 and 33-Inch Automatic Scrubbers



With the high performance Wrangler 2730 and 3330 DB, cleaning large areas has never been easier. These rugged and maneuverable autoscrubbers are unsurpassed for cleaning power, productivity, and dependability.

- The large 30-gallon solution tank and oversized recovery tank mean fewer refills and more time spent cleaning.
- Available in both 27-inch and 33-inch working widths, these Wranglers are cost-savers for large areas up to 84,000 square feet.
- Variable speed wheel drive, in both forward and reverse, provides exceptional maneuverability while allowing the operator to match the machine's working speed to a comfortable pace, reducing fatigue.
- Two .75 HP brush motors and a powerful .75 HP vacuum motor (1 HP vacuum motor optional) combine with up to 150 lbs. of brush pressure to handle heavy scrub jobs with ease.
- The high-frequency, "smart" on-board battery charger uses a temperature sensor to maximize charging efficiency.
- Optional Auto-Fill Battery Watering System and optional Low-Water Battery Alarm are available to help assure long battery life.

NSS Enterprises, Inc.
3115 Frenchmens Road
Toledo, Ohio 43607-2958
USA
www.nss.com



Wrangler® 2730/3330 DB Specifications

Brush/Pad -2730 DB -3330 DB Motor -Type -HP -Speed -Pressure -Pad Drivers • 2730 DB • 3330 DB	27 in. (69 cm) 33 in. (84 cm) 36V, 2 permanent magnet, gear motors .75 HP each 200 RPM 75 lbs. (34 kg) floating 150 lbs. (68 kg) heavy 2 14 in. (36 cm) poly back tufted with cup 2 17 in. (43 cm) poly back tufted with cup	Drive Motor -Type -HP Drive System -Speed -Wheel Construction -Tank • Solution • Recovery -Frame -Casters	36V., permanent magnet .5 HP Roller chain and sprockets Variable Forward 0-240 ft. (0-73 m) Reverse 0-170 ft. (0-52 m) 10 in. (25 cm) dia. x 4 in. (10 cm) tread; non-marking rubber; slip-resistant with slip grip tread Rotocast polyethylene 30 gal. (113.5 l.) 33 gal. (125 l.) 7-gauge steel Two 6 in. (15 cm) dia. mounted on rubber shock absorber	Squeegee -2730 DB -3330 DB Dimensions -Length 2730 -Length 3330 -Skirt Width 2730 -Skirt Width 3330 -Body Width -Height Weight -Machine • 225 AH • 325 AH -Shipping • 225 AH • 325 AH Warranty	32 in. (81 cm) 38 in. (97 cm) Swing-type, adjustable; urethane blades; curved squeegee available 64 in. (163 cm) 66 in. (168 cm) 30 in. (76 cm) 35.5 in. (90 cm) 25.5 in. (65 cm) 42 in. (107 cm) 864 lbs. (392 kg) 1,110 lbs. (504 kg) 990 lbs. (449 kg) 1,195 lbs. (543 kg) 3 year limited 10 year poly parts
Vacuum Motor -Type -HP -CFM -Waterlift Batteries 6 - 6V. batteries; 225 AH (3.5 hour runtime) 325 AH (4.5 hour runtime) Sound Level	36V, 3-stage, bypass, tangential discharge .75 HP, 1 HP available 72 (2 m ³) @ 1.5 in. (3.8 cm) 60 in. (152 cm) 72 dbA @ operator	Switches & Controls	Adjustable manual valve control with automatic solution shut-off in neutral. Emergency stop button. Brush pressure adjust lever. Vacuum and brush switches.		
Productivity — Floor coverage figures taken from ISSA 447 Cleaning Times.			Wrangler 2730 DB		Wrangler 3330 DB
	Per Hour Theoretical/Practical		27,027/12,526 sq. ft.		32,872/15,309 sq. ft.

① Hour meter included to track scheduled maintenance intervals.


⑩ Emergency stop master switch protects the operator.

② The recovery tank holds 33-gallons, extending runtime and productivity.

③ Optional low profile side skirt provides clearance under counters. Optional power deck lift reduces operator fatigue.

④ Side skirts can be mounted upside-down for transport.

⑤ Large diameter squeegee bumper wheels reduce the possibility of catching squeegee.

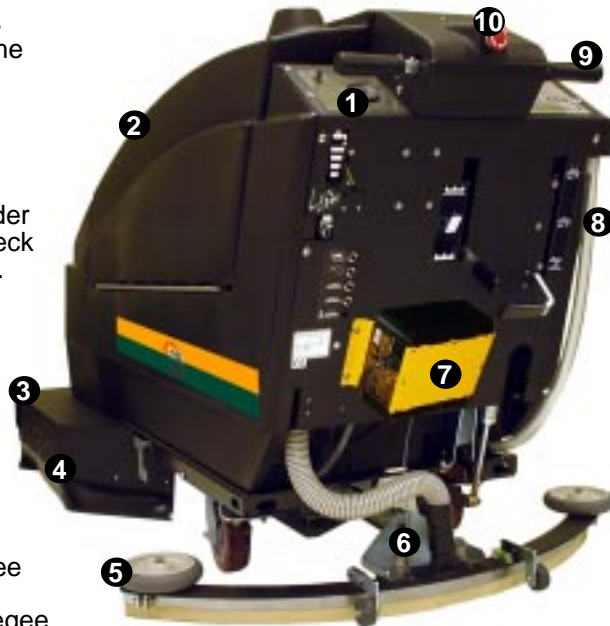

⑨ Ergonomic handle grips won't come off. A torsion spring throttle makes it easy to modulate working speed.

⑧ The PROeye battery fluid indicator on NSS batteries lets the operator easily monitor when a battery needs water.

⑦ The on-board battery charger provides the convenience of charging the batteries anytime, anywhere.

⑥ The parallel-arm squeegee bracket stays parallel to the floor when raised, preventing bumping or catching the assembly.

DISTRIBUTED BY



NSS® Enterprises, Inc.
 3115 Frenchmens Road
 Toledo, Ohio 43607-2958 USA
 419/531-2121 Fax 419/531-3761
www.nss.com
mailus@nss.com
 Specifications and appearance
 subject to change without notice.